




[www.bunsen.es](http://www.bunsen.es)

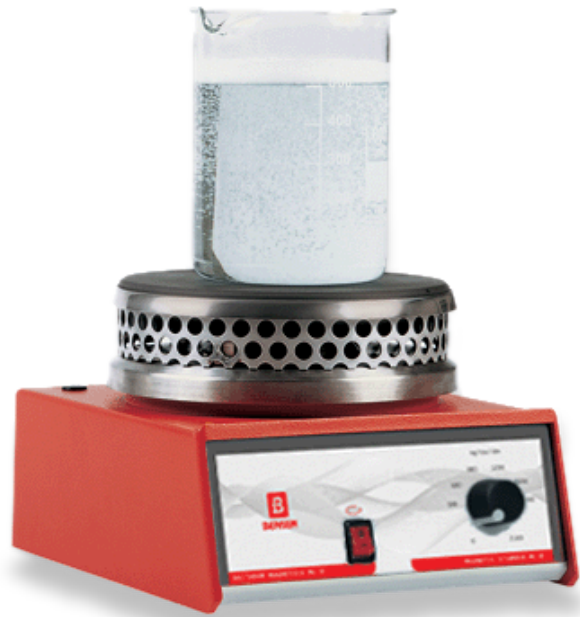

# HEATING PLATE

Ref. 1500

## GENERAL CHARACTERISTICS

- \* Circular heating plate of solid steel.
- \* External injection cabinet painted in epoxy.
- \* It incorporates a safety thermostat that disconnects the plate if the temperature exceeds 350°C..
- \* Electronic voltage regulation that allows variation of the power between 10% and 100% of this voltage.
- \* As an option, it can be fitted with a connection in the rear end for a contact thermometer or a digital programmer.
- \* It is equipped with a luminous start-up switch and a pilot light to indicate the operation of the resistance.

**Manufactured according to EC directives.**



BUNSEN SA. C/ Río Alberche, 30, - 28970 - Humanes de Madrid, Madrid. SPAIN  
Tlf. +34 916 113 584 - Fax. +34 916 128 254  
[info@bunsen.es](mailto:info@bunsen.es) - [www.bunsen.es](http://www.bunsen.es)



Ref	Dimensions W x H x D	Surface	Max. temp	Consumption (W)	Weight (Kg)
1500	180 x 125 x 220mm.	Ø 150 mm.	350°C	500	2

Ref	Accessories
1521	Rear power outlet for contact thermometer
1520	Bar supports 12 Ø x 450 mm. adaptable to the cabinet
1735	Digital programmer



BUNSEN SA. C/ Río Alberche, 30, - 28970 - Humanes de Madrid, Madrid. SPAIN  
Tlf. +34 916 113 584 - Fax. +34 916 128 254  
[info@bunsen.es](mailto:info@bunsen.es) - [www.bunsen.es](http://www.bunsen.es)

